


+ Type K THERMOMETER

# DEW POINT HUMIDITY METER

Model : HD-3008

ISO-9001, CE, IEC1010

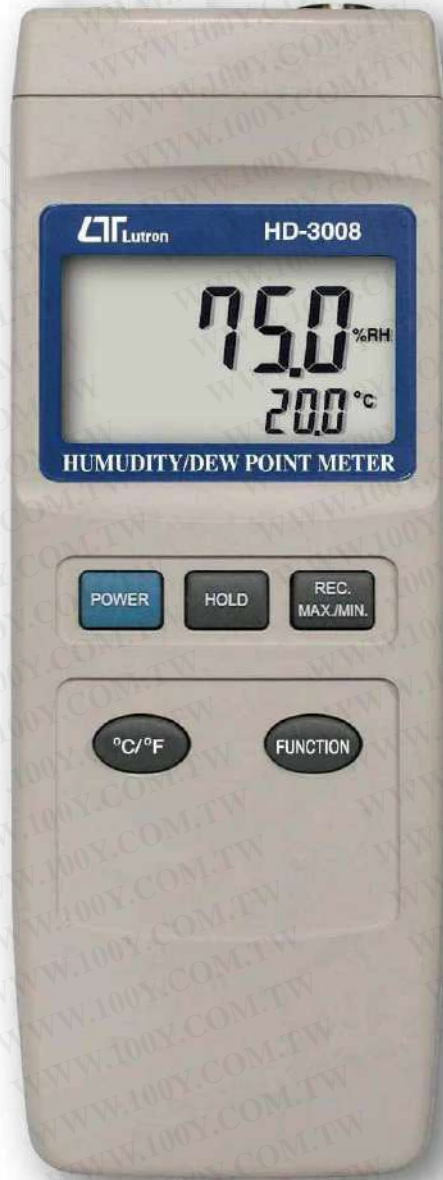

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



LUTRON ELECTRONIC

*The Art of Measurement*

+ TYPE K THERMOMETER

# Dew Point HUMIDITY METER

Model : HD-3008

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

FEATURES	
* Humidity + Dew point + Type K Thermometer are combined into one meter, intelligent.	* Records Maximum and Minimum readings with recall.
* Humidity measurement uses a high precision thin-film capacitance sensor for fast response, not depend on air movement past the probe.	* Data hold function for stored the desired value on display.
* Thin-film capacitance sensor for humidity measurement, high precision.	* RS 232 PC serial interface.
* Type K thermometer build in temperature linearity & precision cold junction compensation circuit, high accuracy.	* Show the humidity & temperature values on the LCD display at same time.
* Microprocessor circuit assures maximum possible accuracy, provides special functions and features.	* Temperature function for °C or °F be selected by push button on front panel easily.
* Large LCD with two display, easy readout.	* Built-in low battery indicator.
* Heavy duty & compact housing case, designed for easy carry out & operation.	* Humidity probe built-in thermistor sensor for temperature measurement, fast response time.
* Auto shut off saves battery life.	* Wide range both of humidity & temp. measurement.
	* Separate humidity & temp. probe, easy operation. & remote measurement.

GENERAL SPECIFICATIONS			
Circuit	Custom one-chip of micro-processor LSI circuit.	Operating Humidity	Main instrument, Less than 80% R.H.
Display	51 mm x 32 mm, 15 mm ( 0.6" ) digit size. dual function LCD display,	Power Supply	006P DC 9V battery ( Alkaline or Heavy duty type ).
Measurement	Humidity meter : R.H. ( Relative Humidity ) Temperature - °C, °F.	Power Current	Approx. DC 7 mA.
	Dew point : °C, °F.	Weight	250 g/0.55 LB (battery included).
	Type K thermometer	Dimension	Main instrument: 195 x 68 x 30 mm ( 7.6 x 2.6 x 1.2 inch )
Sensor	Humidity ( Dew Point ) meter : Humidity : High precision thin-film capacitance sensor. Temperature : Thermistor. Type K thermometer : Thermocouple probe.		Humidity Sensor Probe: Round 26 mm Dia. x 160 mm.
Data Hold	By push button	Accessories	Instruction manual..... 1 PC. Humidity probe..... 1 PC. Carrying Case..... 1 PC.
Memory Recall	Maximum & Minimum.	Optional Accessories	33% RH HUMIDITY CALIBRATPR Model: RHA-33
Sampling Time	Approx. 0.8 second.		75% RH HUMIDITY CALIBRATPR Model : RHA-75
Power off	Auto shut off, saves battery life, or manual off by push button.		Type k thermocouple Probe : TP-01, TP-02A, TP-03, TP-04.
Data Output	RS 232 PC serial interface.		RS232 cable, UPCB-02
Operating Temperature	0 to 50 °C.		Application software, SW-U801-WIN
			Application software, sw-u801-WIN

ELECTRICAL SPECIFICATIONS ( 23 ± 5 °C )			
<b>Humidity/ Temperature</b>			
Humidity	Range	10 % to 95 % R.H.	
	Resolution	0.1 % R.H.	
	Accuracy (after calibration)	70 % R.H. - ± ( 3 % reading + 1 % R.H.) < 70 % R.H. - ± 3% R.H.	
Temperature	Range	0 °C to 50 °C, 32 °F to 122 °F.	
	Resolution	0.1	
	Accuracy	°C - ± 0.8 °C, °F - ± 1.5 °F.	
<b>Dew Point</b>			
°C	Range	-25.3 °C to 48.9 °C	
	Resolution	0.1 °C	
°F	Range	-13.5 °F to 120.1 °F.	
	Resolution	0.1 °F.	
<i>Remark :</i>			
* Dew Point display value is caculated from the Humidity/Temp. measurement automatically.			
* The Dew Point accuracy is sum accuracy value of Humidity & Temperature measurement..			
<b>Type K Thermometer</b>			
	Range	Resolution	Accuracy
°C	-100.0 to 1300.0 °C	0.1 °C	-50.0 to 1300.0 °C : ± ( 0.2 % + 0.5 °C )
			-50.1 to -100.0 °C : ± ( 0.2 % + 1 °C )
°F	-148.0 to 2372.0 °F	0.1 °F	-58.0 to 2372.0 °F : ± ( 0.2 % + 1 °F )
			-58.1 to -148.0 °F : ± ( 0.2 % + 1.8 °F )

THERMOCOUPLE PROBE (type K), optional			
TP-01	-40 °C to 250 °C (300°C short- term). Ultra fast response naked-bead probe.	TP-03	-50 °C to 1200 °C ( -50 °F to 2200 °F). High temp., Penetration & immersion.
TP-02A	-50 °C to 900 °C ( -50 °F to 1650 °F). Penetration & Immersion applications.	TP-04	-50 °C to 400 °C ( -50 °F to 752 °F). Precision surface temp. measurement usage.

\* Appearance and specifications listed in this brochure are subject to change without notice.